



Family: Palm | Item No. 4948 PG



Drawing 1 - Fixture Assembly

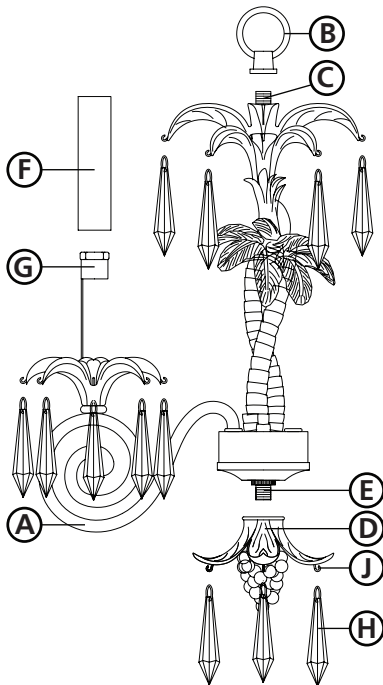

▼ start here

1

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

***** The construction of this fixture will be accomplished by first assembling the main body of the fixture, making all necessary electrical connections, hanging the fixture from the ceiling, and then attaching crystal pendants.**

SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.

2

1. To assemble fixture, spread the arms **(A)** of the fixture so they are evenly spaced 120 degrees apart.
2. Holding wire tight, thread top loop **(B)** onto nipple **(C)**.
3. Thread bottom finial **(D)** onto nipple **(E)**.
4. Please refer to the hanging instruction sheet **(I.S. 19)** provided to hang fixture. Then refer back to this sheet to continue installation of this fixture.

3

1. Slip tube **(F)** over socket **(G)**.
2. To attach crystals, hang crystal drop **(H)** from small ring **(J)** and repeat with remaining crystals.
3. Fixture can now be lamped accordingly.

Note: Maximum wattage for 4948 fixture is 60 watts per bulb.

2.7.08