

DOLCE

FR43515BRC

Bulbs: 100W MED.

Replacement Parts: GLASS: R43510GL



ASSEMBLY INSTRUCTIONS

Assembly of this fixture will be accomplished by first assembling the body of the fixture, installing the mounting hardware to the junction box, making all necessary electrical connections, hanging the fixture and then installing the fixture glass.

SAFETY WARNING: Read wiring and grounding instructions [FRIS 18] and any additional directions. Turn power supply off during installation. If new wiring is required, consult a qualified electrician or local authorities for code requirements.

STEP 1


- 1 Slip top column assembly (1) into the bottom base assembly (2) and over the center threaded tube (a) - See Drawing 1.
- 2 Thread knob (3) onto center threaded tube (a) and tighten.

STEP 2 Refer to Hanging Instruction Sheet [FRIS19] to hang fixture. Then refer back to this sheet to continue installation of this fixture.

STEP 3

- 1 Remove ring (3) and spacer (4) from socket (1) - See Drawing 1.
- 2 Slip glass (2) over socket (1) and hold in position.
- 3 Slip spacer (4) and thread ring (3) onto socket (1) and tighten.
- 4 Fixture can now be lamped accordingly.

[DRAWING 1]

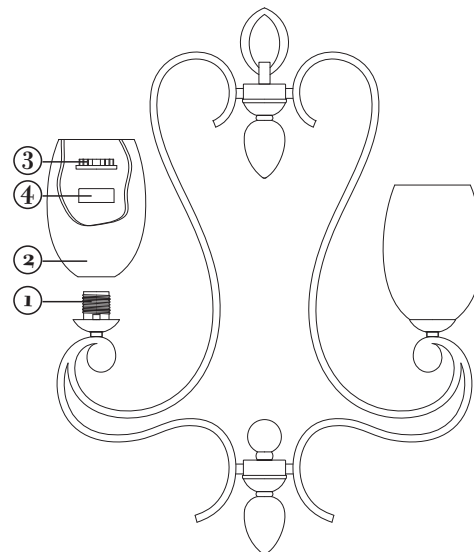

FREDRICK RAMOND

ESTABLISHED 1965

800.421.3517 WWW.FREDRICKRAMOND.COM

11.18.09