

MONDO

FR59094PCM



Bulbs: 60W G9

Replacement Parts: GLASS: R49292GL BULB SHIELD: R4750BLSH

ASSEMBLY INSTRUCTIONS

Assembly of this fixture will be accomplished by first installing the mounting hardware to the junction box, making all necessary electrical connections, mounting the backplate to the wall and then installing the fixture glass.

SAFETY WARNING: Read wiring and grounding instructions [FRIS 18] and any additional directions. Turn power supply off during installation. If new wiring is required, consult a qualified electrician or local authorities for code requirements.

STEP 1

- 1 Prepare mounting strap (a) by threading nipple into the center hole of the mounting strap (a), approximately 1/4" - see Drawing 2.
- 2 Attach mounting strap (a) to junction box (j) using two screws (b) provided.

STEP 2 Make electrical connections from supply wire to fixture lead wires. Refer to instruction sheet (I.S. 18) and follow all instructions to make all necessary wiring connections. Then refer back to this sheet to continue installation of this fixture.


STEP 3

- 1 To mount backplate to wall, slip center hole of backplate (e) over nipple (c) and hold fixture in position - see Drawing 2.
- 2 Thread decorative knob (d) onto end of nipple (c) and tighten to secure fixture.
- 3 Fixture can now be lamped accordingly.


STEP 4

- 1 To install glass, remove socket ring (2) from socket (1) - see Drawing 1.
- 2 Slip glass (3) over socket (1).
- 3 Thread socket ring (2) onto socket (1) and tighten to secure glass (4).
- 5 Thread bulb shield (4) onto socket (1). Note: DO NOT overtighten.

[DRAWING 1]

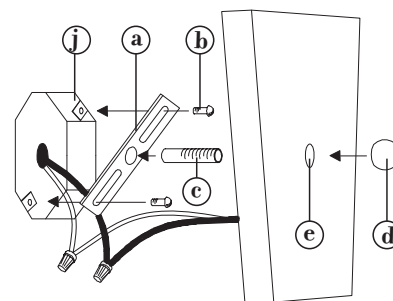

[DRAWING 2]

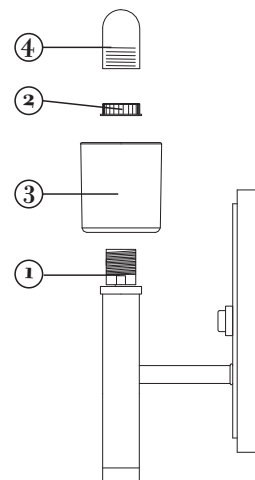

FREDRICK RAMOND

ESTABLISHED 1965

800.421.3517 WWW.FREDRICKRAMOND.COM

2.17.09