


MONDO



FR49292PCM

Bulbs: 60W G9

Replacement Parts: GLASS: R49292GL BULB SHIELD: R4750BLSH

ASSEMBLY INSTRUCTIONS


Assembly of this fixture will be accomplished by first installing the mounting strap to the junction box, making all necessary electrical connections, mounting the fixture to the wall and then installing the fixture glass.

SAFETY WARNING: Read wiring and grounding instructions [FRIS 18] and any additional directions. Turn power supply off during installation. If new wiring is required, consult a qualified electrician or local authorities for code requirements.


STEP 1

- 1 Prepare mounting strap (a) by threading long mounting screws (b) into the back of the mounting strap (a), making sure the holes into which the screws are threaded match the spacing of holes (d) in the backplate (e) - See Drawing 1.
- 2 Attach mounting strap (a) to junction box (j) using two shortest mounting screws (c).
- 3 Make electrical connections from supply wire to fixture lead wires. Refer to instruction sheet [FRIS18] and follow all instructions to make all necessary wiring connections. Then refer back to this sheet to continue installation of this fixture.
- 4 To mount fixture, slip the two mounting screws (b) through the two mounting holes (d) in the backplate (e).
- 5 While holding fixture in place, thread the two ball knobs (f) on to the end of the mounting screws (b), and tighten.

[DRAWING 1]

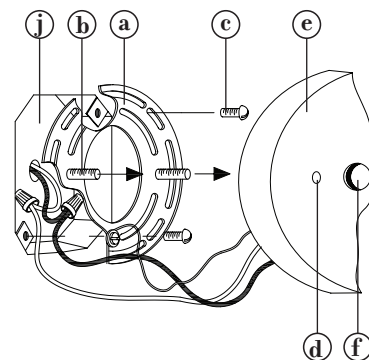

[DRAWING 2]

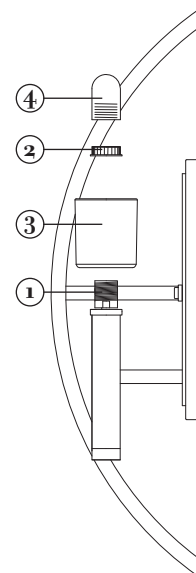

STEP 2

- 1 To install glass, remove socket ring (2) socket (1) - See Drawing 2
- 2 Slip glass (3) over socket (1).
- 3 Thread socket ring (2) onto socket (1) and tighten to secure glass (3).
- 4 Fixture can now be lamped accordingly.
- 5 Thread bulb shield (4) onto socket (1). Note: Do not overtighten.



FREDRICK RAMOND

ESTABLISHED 1965

800.421.3517 WWW.FREDRICKRAMOND.COM

2.17.09